

CONTACT US



WEIGHT CHART

| SIZE/STYLE | LBS/FT | SIZE/STYLE | LBS/FT | SIZE/STYLE | LBS/FT | SIZE/STYLE | LBS/FT |
|------------|--------|------------------|--------|-----------------|--------|------------------|--------|
| 08B-3-6P | 1.5 | 80-2SL-LP | 4.4 | 80-3-W4P | 5.7 | 100-2SL-LP | 6.3 |
| 08B-6-6P | 3.0 | 80-2-5PEP/4-STA | 4.4 | 80-4-P | 8.0 | 100-2-P4PAD | 6.0 |
| 50-1-STD | 2.3 | 80H-2-STD | 4.6 | 80-4-STD | 8.1 | 100-3-STD | 9.2 |
| 50-2-STD | 2.6 | 80H-2-5PEP/4-STA | 4.6 | 80-4SL-LP | 8.3 | 100-3SL-LP | 9.2 |
| 60-1-STD | 1.2 | 80-2-4PSTA | 4.4 | 80-4-5PEP/4-STA | 8.6 | 100-2-5PEP | 6.5 |
| 60-1-P2PAD | 1.2 | 80-2-4PSTA | 4.4 | 80-6-STD | 12.0 | 120-1-STD | 4.5 |
| 60-2-STD | 2.4 | 80H-2-P8PAD | 4.6 | 80-6SL-LP | 12.0 | C2080H-4-Nubbins | 6.1 |
| 60-3-STD | 3.6 | 80SH-2-STD Super | 4.6 | 80-6-5PEP | 12.0 | C2100H-2-DP | 4.9 |
| 80-1-STD | 2.1 | 80-3-STD | 6.3 | 80-8-STD | 16.0 | 32B-1-DP/5269 | 8.2 |
| 80-1SL-LP | 2.4 | 80-3SL-LP | 6.3 | 100-1-STD | 3.1 | 3" Sharp Chain | 8.2 |
| 80-2-STD | 4.2 | 80-3-5PEP | 6.6 | 100-1SL-LP | 3.4 | 4" Sharp Chain | 5.0 |
| 80-2-P8PAD | 4.0 | 80-3-W2P | 5.7 | 100-2-STD | 6.1 | 6" Sharp Chain | 18.5 |



LANGLEY
HQ

27474 Gloucester Way, Langley BC, Canada V4W 4A1
t 604.882.1602 toll free 1.800.324.1244

QUEBEC
DISTRIBUTION CENTER

11194 Chem. Industriel #108 Saint-Nicolas, QC G7A 1B1
t 418.834.5116 toll free 1.888.650.6090

ATLANTA
SERVICE CENTER

3411 Novis Pointe, Acworth, GA, USA 30101
t 678.797.0777 toll free 1.877.941.1500


PORTLAND
DISTRIBUTION CENTER

5915 N Marine Dr, Portland, OR, USA 97203
t 503.222.9992 toll free 1.800.367.9992

SHARP TOP CHAIN®

| | | | STRANDS | | | | | |
|--|--|---|----------------------------|----|----|----|----|----|
| | | | -1 | -2 | -3 | -4 | -6 | -8 |
| | | STD Summit Tip Design | | | | | | |
| | | 5 PEP 5 Points Every Pitch | | | | | | |
| | | 4 STA 4 Points Every Pitch | | | | | | |
| | | 4ST 4 Points Every 2nd Pitch | | | | | | |
| | | SL-LP Slasher, Low Profile | | | | | | |
| | | SL-LP Slasher, Low Profile | | | | | | |
| | | P2PAD Points Every 2nd Pitch Alternating Directions | | | | | | |
| | | SP Single Point | | | | | | |
| | | P4PAD Points Every 4th Pitch Alternating Direction | | | | | | |
| | | P8PAD Points Every 8th Pitch Alternating Direction | | | | | | |
| | | 50 STD Summit Tip Design | 50-1, 50-2 | | | | | |
| | | 08B-6P 6 Points Every Pitch | 08B-3, 08B-6 (1/2") | | | | | |
| | | W4P Waferizer Every 4th Pitch | 80-3 | | | | | |
| | | W2P Waferizer Every 2nd Pitch | 80-3 | | | | | |
| | | DP 2 Points Every 2nd Pitch Double Deep Plate, Also Available | 5269 - 5202 - 5167 | | | | | |

Popular Pitch Sizes and Widths

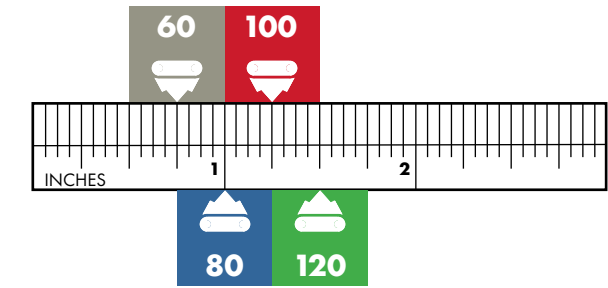

- Consistent Quality
- Closest Tolerances
- Positive, Fast Feeding
- Quad Staked Pins and Solid Rollers
- Heat Treated and Shot Peened
- Solid One-piece Center Plates
- Ground Bottom Surfaces

IH - INDUCTION HARDENED SHARP TOPS



SHARP CHAIN - 3", 4" and 6" Pitch

- Hardened Investment Castings
- Hardened Inner Links
- Hardened Steel Bushings
- Precision Machined Tolerances
- Flush Rivets
- Available with Zirc Grease Fittings

